

## 08 Type Quick Assembly Connector

### Introduction

Quick Assembly SC connector can provide quick and easy terminations of fibers in the field. It allows the installer to terminate and make connection in minutes at equipment and fiber patch panels. This connector system with features of high installation quality, high success rate and high reliability. Applicable to 2\*3, 2\*1.6 cables.




### Specifications

Parameters	Value		Parameters	Value
Insertion Loss	Average $\leq 0.3$ DB, max $\leq 0.5$ DB		Repeatability (500 Mating Times)	Average $\leq 0.3$ DB, max $\leq 0.5$ DB
Return Loss	$\geq 45$ dB		Temperature cycle	
Tensile strength	F>50N		Vibration test	
Operating Temperature	-20 ~ +75°C		Flooding test	
Storage Temperature	-40 ~ +85°C		Tensile strength	F>50N

## Operation Instruction

### Product Components

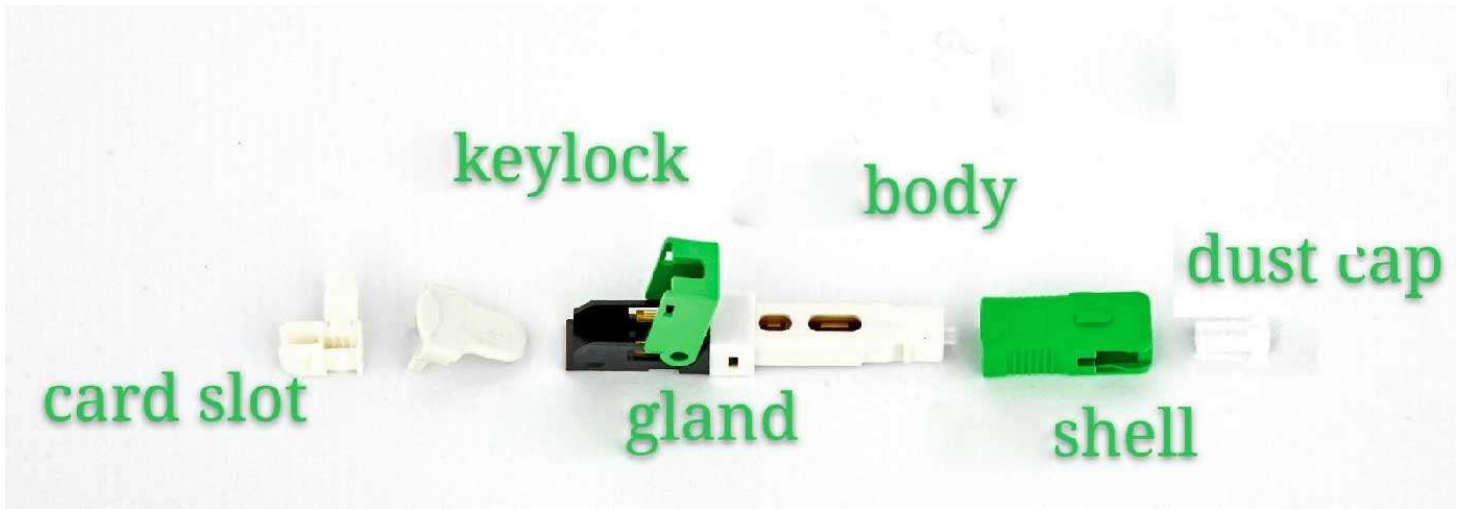

## Necessary Tools

FTTH Drop Cable Stripper



Fiber Stripper



Fiber Cleaver



## Ordering Information

FC-SC-A-08	08type fast connector, SC/APC
FC-SC-U-08	08type fast connector, SC/UPC

